



SKYINBOW POWER SERIES ACTIVE TRANSDUCER SYSTEM INSTALLATION MANUAL

VIOLIN & VIOLA

Thank you for purchasing your new Skyinbow Power Series Active Transducer System.

FITTING INSTRUCTIONS – Please Read Carefully!


1. Charge the Power Series System by connecting known a good 9V (PP3) battery to the supplied Battery Recharge Connector and plugging the combination into the ¼" (6.35mm) output jack for one to two minutes. A full charge will give you approximately 10 hours of playing time.

The system switches on and off automatically when a mono (TS-TS) or stereo (TRS-TRS) jack lead is inserted and removed.

Once the system is charged, check that the system is working by plugging the system into an amplifier using the jack lead and gently tapping the transducer. Please handle the transducer carefully.

2. Remove the bridge from the instrument.

Drill a **flat ended** blind hole 1/8" (3.2mm) diameter into the bridge at the point marked below to a depth of 1/8" (3.2mm). Drilling this hole completely through the bridge is not required.

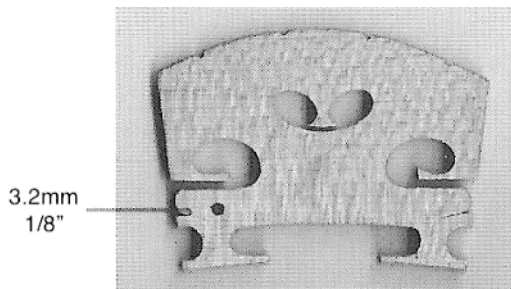

3. Insert the transducer into the hole that you have drilled. It is important to make sure that the line on the transducer tip is horizontal as you insert it into the bridge.

In order to ensure that the active part of the transducer is completely inside the bridge, you should be sure to insert the transducer to the point where its tip is in contact with the flat end of the hole. The transducer is designed to be a snug fit in the hole.

4. When you are satisfied that the transducer is fitted correctly, we recommend that you secure it permanently in place with a small amount of low viscosity superglue. The superglue will bond the transducer firmly to the bridge, which optimises both tone and volume.
5. Mount the chinrest in position on the instrument.
6. Place the bridge back in position on the instrument and restring.
7. **Enjoy your new pickup!**

We recommend that you have the fitting carried out by a professional luthier.

If you have any questions or run into any issues in regard to fitting your Skyinbow Power Series Active Transducer System, please check out our website or contact us directly at info@pureacoustic.com. We will be only too pleased to assist you.

Pure Acoustic Limited
16 Beaudesert, Leighton Buzzard, Bedfordshire, UK LU7 1HZ
Email: info@pureacoustic.com Tel: +44 (0) 1525 217875 / +44 (0) 7831 112433
www.pureacoustic.com